
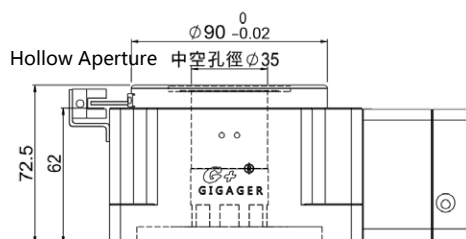



GSHR100

Series	Size	Ratio	Motor
GSHR	100	30K	SV1
	100 150		SV1 : Servo Ø14 PCD70,M4 SV2 : Servo Ø14 PCD70,M5 SV3 : Servo Ø11 PCD70,M4 Suit for 200~400W AC Servo Motor ST1 : Stepper Ø6.35 PCD66.67,M4 ST2 : Stepper Ø6.35 PCD70.7,M4 ST3 : Stepper Ø8 PCD70.7,M4 ST4 : Stepper Ø8 PCD66.67,M4 Suit for 57 /60 Stepper Motor

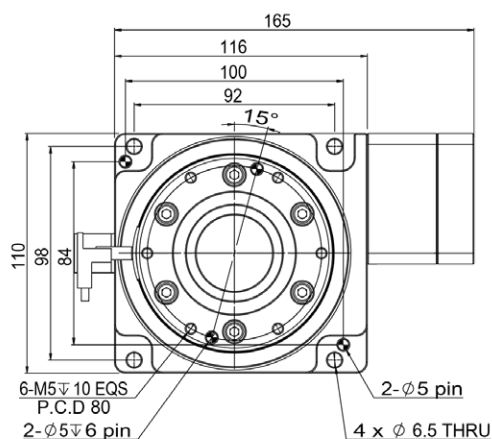

Technical Parameter

Bearing of Rotary table		cross roller bearing
Permissible Torque	N.m	80
Allow Table Speed	rpm	100
Gear Ratio	i	30
Repeatability	arc-sec	≤ 10
Positioning Accuracy	arc-min	≤ 1
Allowable Axial Load	N	1500
permissible Inertial Torque	N.m	75
Table Flatness	mm	≤ 0.01
Table Concentricity	mm	≤ 0.01
Ingress Protection	IP	53
Weight	kg	3.6